



FULLY LOUVRED DOOR



FULLY LOUVRED


DOOR LEAF

- Thickness:** 48mm
- Material:** 1.2mm corrosion resistant Zintec/Aluzinc as standard, wide variety of colours and finishes available. Also Stainless Steel.
- Construction:** Doorblade manufactured from 1.2mm steel. The louvre blades are inclined at 45° and mounted at 50mm centres within a 50mm deep angle frame, which is mounted on a box section sub-frame for rigidity. A galvanised bird & vermin mesh can be supplied.

DOOR FRAME


- Construction:** Folded from 1.6mm Zintec/Aluzinc. Screw and tab construction with 4no. adjustable fixing feet per jamb, variable sub-frame supplied as standard to accommodate site tolerance of -0/+30mm. The frame is fitted with 3no. Class 13 stainless steel hinges with 2no. security dog bolts.

Profile:

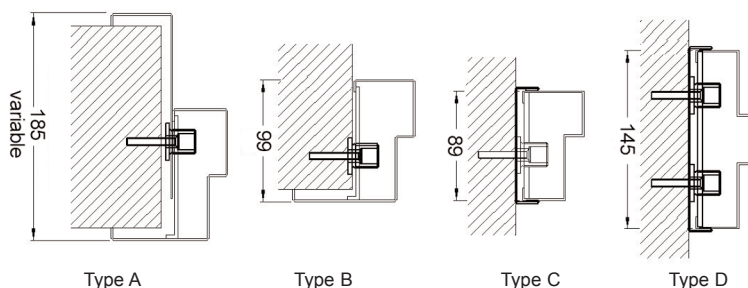

THRESHOLD

- Standard:** 15mm rebated threshold.
- Optional:** 5mm driveable (DDA compliant).
12.5mm 564A Aluminium (DDA compliant).

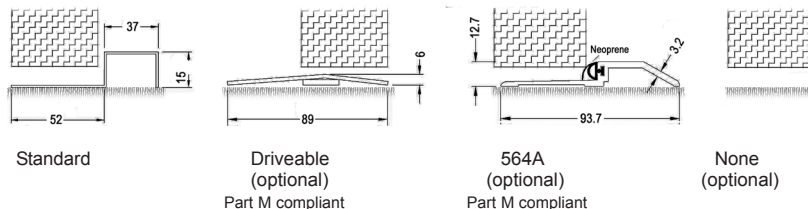

FINISHES

- Standard:** Pre-primed steel (approximating to BS10A05 Goosewing Grey) requiring site painting.
- Optional:** Polyester Powder Coating from standard colour range.

SIZES

- Size:** Doors are custom manufactured in 10mm increments for single openings 690mm to 1390mm and double openings 1290mm to 2600mm, at heights up to 2900mm. Contact the Sales office for special configurations and finishes.





FULLY LOUVRED DOOR



FULLY LOUVRED

PANEL ARRANGEMENTS

- Construction:** Side and over panels can be supplied.
- Sizes:** Side panels are available up to 1340mm wide x 2900mm high.
Over panels are available up to 1340 x 2900mm (single door) or 1340 x 2600mm (double door).
- Options:** Hinged or removeable panels are available. Also combinations to create enclosures.
Please consult the Sales office with specific requirements.

